ENERPAC

HYDRAULIC ELECTRIC & MANUAL CUTTERS

THE SOLUTIONS PROVIDER FOR YOUR INDUSTRIAL CUTTING NEEDS

ENERPAC
TOOLS. SERVICES. SOLUTIONS.

World-Class Cutters

When you need to make cuts through heavy-duty bar, chain, cable and similar materials, look no further than Enerpac's broad range of cutters.

An extensive lineup of hydraulic, electric and manual cutters provides a quick, safe and cost-effective solution for technicians from construction, mining, manufacturing and many other industries.

Enerpac's cutters are built to handle industrial-grade materials on a daily basis. Like all Enerpac tools, each cutter is designed and built to last in tough working conditions for a safer, simpler and more productive workflow.

Cutter Type		Maximum Tool Capability*	Series		Power Source	Pages
Bar Cutters		2.04" (Maximum Material Cutting Diameter)	**EB**		Hydraulic, Electric	4-7
Chain Cutters		1.25" (Maximum Link Cutting Diameter)	**ECC**		Electric	8-9
Wire and Cable Cutters		7.09" (Maximum Material Cutting Diameter)	**EWC**		Hydraulic, Electric	10-13
Flat Bar Cutters		2.75" x 0.59" (Maximum Material Cutting Height and Width)	**EFB**		Electric	14-15
Decommissioning Cutters		6.69" (Maximum Blade Aperture)	**EDC**		Hydraulic	16
Hydraulic Cutterheads		4.00" (Maximum Material Cutting Diameter)	**WHC WHR STC**		Hydraulic	17
Self-Contained Hydraulic Cutters		3.38" (Maximum Material Cutting Diameter)	**WMC**		Manual	18
Pumps and Accessories		2.5 Gallons (Usable Oil Capacity)	**ZE6**		Electric	19

* Actual cutting capabilities may vary depending on material being cut.

▼ Shown left to right: **EBH30 and EBE22B**

Your Fast, Safe and Simple Solution for Cutting Metal Bar

Productivity

- **A broad range of hydraulic and electric tools quickly and easily cut through heavy-duty bar**
- **Highly durable, long-lasting blades outlast angle grinder or saw blades**

Safety

- **Controlled cutting process enhances user safety compared with use of cut-off blades**
- **Minimal spark risk compared to torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

Internal Mechanics

EBH-Series: Cylinder is driven by an external Enerpac pump

EBE-Series: Cylinder is driven by a radial pump powered by an electric motor

Typical Bar Cutting Applications

- Commercial and residential construction
- Concrete and masonry
- Metal fabrication
- Industrial manufacturing

▼ *Enerpac's bar cutters are built to handle tough cutting applications.*

EBH-Series Hydraulic Bar Cutters

EBH-Series Hydraulic Bar Cutters

EBH-Series Hydraulic Bar Cutters are driven by a specialized external hydraulic pump for optimal power and a higher duty cycle compared with other cutter types.

These cutters are ideal for use in production or manufacturing facilities with demanding, high-volume cutting applications.

EBH Series

Maximum Material Hardness:
43 HRc

Maximum Material Diameter:
1.18 - 2.04 inches

Maximum Operating Pressure:
10,000 psi

① Highly durable blades maintain effectiveness throughout rigorous use
② Safety guard helps protect hands from injury
③ Heavy-duty cutting head provides a longer operational life
④ Lifting handle enables easier positioning and transport
⑤ Double-acting cylinder with advance and retract buttons improves control and reduces jamming
⑥ External hydraulic pump helps keep the tool cool, improving operational time (pump, hose, and pump coupler sold separately)

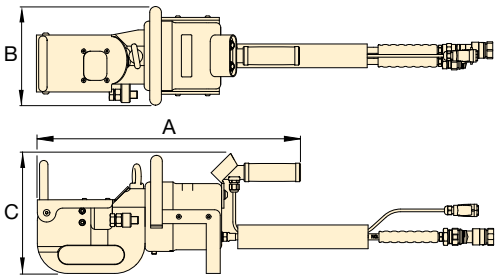

Drawings are for guidance purposes only, exact tool configurations vary by model.

Pumps and Accessories

The EBH-Series Cutters are designed to work with ZE6410X-Series pumps.

Pump models vary by voltage type. The pump and hose are sold separately. Both are required for the system to function. See page 19 for complete details on required pumps and accessories.

Cutter Model Number	Pump Model Number	Hose Model Number
EBH30 EBH35 EBH52	ZE6410XG-S	CH720EC
	ZE6410XJ-S	
	ZE6410XK-S	
	ZE6410XW-S	

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

Maximum Material Diameter* (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in) A	B	C	Weight (lbs)	Replacement Blade Kit Number
1.18	**EBH30**	87,000	43	50	10,000	18.9	7.2	8.7	46	**EBH3001K**
1.38	**EBH35**	89,900	43	68	10,000	22.3	8.4	10.2	106	**EBH3501K**
2.04	**EBH52**	72,500	43	121	10,000	30.1	10.39	12.2	299	**EBH5201K**

* Maximum material properties indicated refer to the material to be cut.

EBE-Series Electric Bar Cutters

The versatile EBE-Series Electric Bar Cutters quickly cut through heavy-duty bar up to one inch (26 mm) in diameter without the need for an external hydraulic pump. Their compact size and low weight enable them to be easily transported and used wherever an external power source is available.

EBE Series

Maximum Material Hardness:
43 HRc

Maximum Material Diameter:
0.87 - 1.02 inches

Voltage:
120 and 230 Volts

* ETL certification applies to 120V tools only

① Highly durable blades maintain effectiveness throughout rigorous use
② Safety guard helps protect hands from injury
③ Heavy-duty cutting head provides a longer operational life
④ Lifting handle enables easy positioning and transport
⑤ Piston-release mechanism allows blade to be reset, reducing jamming and providing a controlled cutting process

EBE22

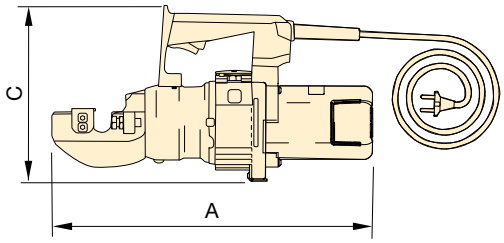



EBE26

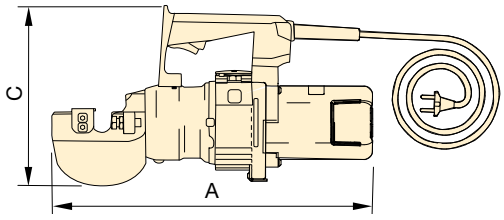

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 6-15 plug)
E = 230V, 50 Hz (with European-style SCHUKO plug)

Maximum Material Diameter* (in)	Power Specifications Volts	Hz	Amps	Watts	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Dimensions (in) A	B	C	Cord Length (ft)	Wt. (lbs)	Replacement Blade Kit Number
0.87	120	60	11	1300	**EBE22B**	94,275	43	25.1	18.1	5.5	9.8	6	29	**EBE2201K**
0.87	230	50	6.8	1400	**EBE22E**	94,275	43	25.1	18.1	5.5	9.8	10	29	**EBE2201K**
1.02	120	60	11	1300	**EBE26B**	94,275	43	37	18.4	5.5	10.2	6	35	**EBE2601K**
1.02	230	50	6.8	1400	**EBE26E**	94,275	43	37	18.4	5.5	10.2	10	35	**EBE2601K**

* Maximum material properties indicated refer to the material to be cut.

HYDRAULIC AND ELECTRIC BAR CUTTERS
Typical Applications

Concrete contractors, metal fabricators and other similar companies cut high quantities of metal bar. This application is often performed using angle grinders with cut-off wheels, a solution known to pose a high risk of hand and face injuries. EB-Series Bar Cutters bring tremendous value to this application by increasing productivity, safety and ease of use.

Rebar Cutting

The highly portable EBE-Series tool cuts up to number 8 rebar (1" diameter) with minimal sparks, making it an extremely versatile tool on any construction jobsite.

Miscellaneous Metals Cutting

The EBE-Series Electric Cutters quickly and safely slice through round, square, hexagonal and octagonal steel bar up to 1.02” in diameter.

High-Volume Production Cutting

EBH-Series Hydraulic Cutters are ideally suited for use in metal fabrication shops where a high volume of cutting is required. A powerful external pump with a large reservoir enables the tools to withstand higher duty-cycles, and cut materials up to 2.04" in diameter.

ADVANTAGES

▲ *The fast, safe and simple solution for cutting metal bar*

PRODUCTIVITY

- Hydraulic and electric tools quickly and easily cut through metal bar
- Highly durable blades outlast angle grinder or saw blades

SAFETY

- Controlled cutting process safer than cut-off wheels
- Minimal sparks compared to alternative cutting methods

VERSATILITY

- Compact electric tools are easy to transport to the jobsite
- Powerful hydraulic tools withstand higher duty-cycles and cut larger materials

▼ Shown: **ECCE32B-Series Chain Cutter**

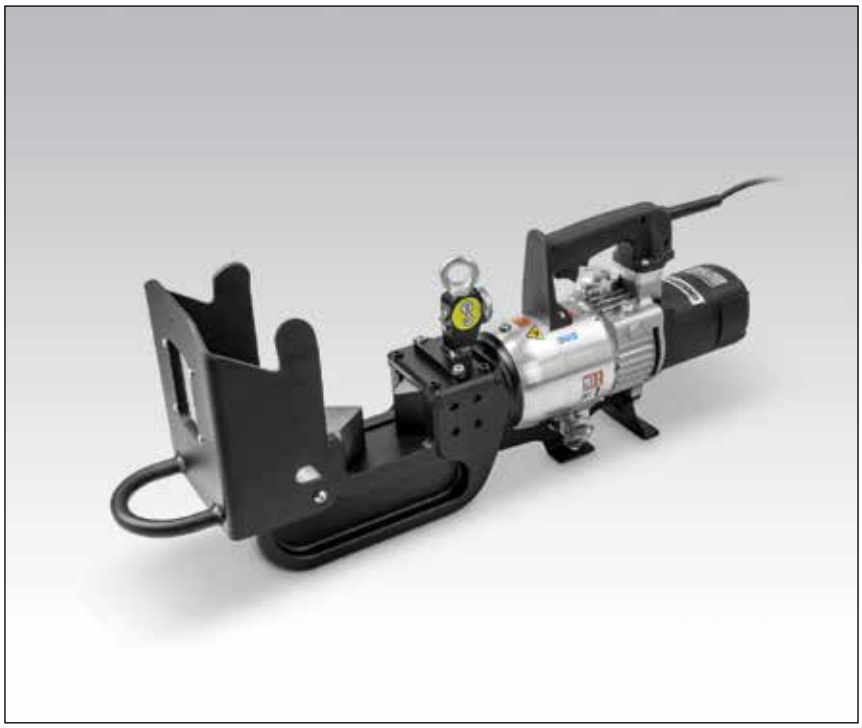

Your Simple Solution for Cutting High-Strength Industrial Chain

Internal Mechanics

ECCE-Series: Cylinder is driven by a radial pump powered by an electric motor

Productivity

- **Quickly cut through heavy-duty chain links with minimal effort**
- **Highly durable blades outlast angle grinder or saw blades**

Safety

- **Controlled cutting process behind a protective shield enhances safety**
- **Minimal spark risk compared to torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

Typical Chain Cutting Applications

- Chain manufacturing
- Mining
- Rigging / material handling for transport
- Oil and gas
- Marine

▼ *Cut through chain links with ease using Enerpac's chain cutters.*

ECCE-Series Electric Chain Cutters

ECCE-Series Electric Chain Cutters

ECCE-Series Electric Chain Cutters are ideal for applications where safety is paramount. Unlike other cutting methods, Enerpac's chain cutters cut chain links behind an enclosed, transparent safety guard, protecting the operator's hands from potential injury while allowing the operator to monitor the cutting process.

ECCE Series

Maximum Material Hardness:
46 HRc

Maximum Material Diameter:
1.25 inches

Maximum Grade Chain:
80

Voltage:
120* and 230 Volts

* ETL certification applies to 120V tools only

① Highly durable blades cut through heavy-duty chain, maintaining effectiveness throughout rigorous use

② Transparent safety guard protects hands and allows continuous monitoring for better management of cutting process

③ Heavy-duty cutting head provides a longer operational life

④ Lifting handle and eyebolt enable easy positioning and transport

⑤ Double-acting cylinder improves control and reduces jamming

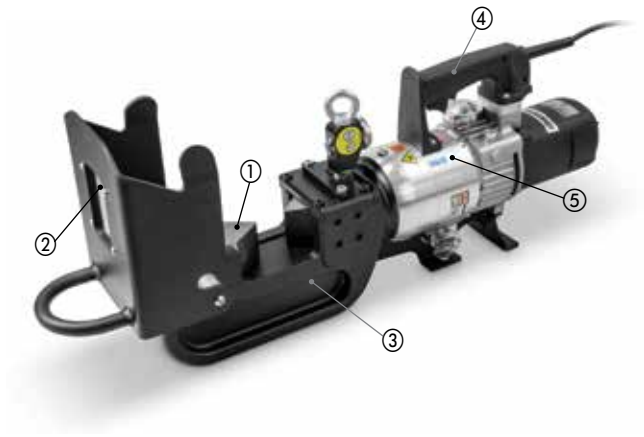

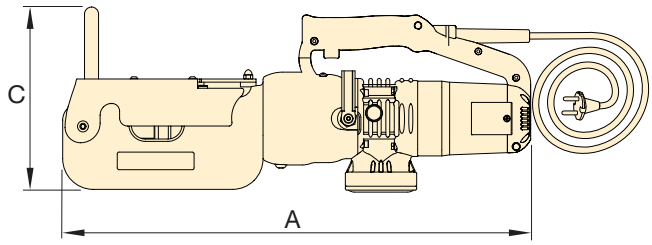

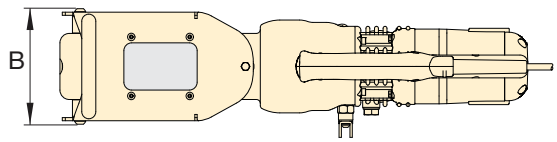

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 6-15 plug)

E = 230V, 50 Hz (with European-style SCHUKO plug)

Max. Material Diameter* (in)		Power Specifications				Model Number	Maximum Material Hardness*	Maximum Cutting Force	Dimensions (in)			Cord Length	Wt.	Replacement Blade Kit Number
Grade 40	Grade 80	Volts	Hz	Amps	Watts		(HRc)	(tons)	A	B	C	(ft)	(lbs)	
1.25	1.00**	120	60	11.0	1300	**ECCE32B**	46	52.9	27.5	7.5	12.6	6	106	**ECCE3201K**
1.25	1.00**	230	50	6.8	1400	**ECCE32E**	46	52.9	27.5	7.5	12.6	10	106	**ECCE3201K**

* Cutting larger chains or those of a grade higher than those recommended will result in increased wear, and may damage the tool. The risk of this may be minimized by cutting one link side at a time. See instruction manual for more information.

** One-inch grade 80 chain must be cut one side of the link at a time.

▼ Shown left to right: **EWCH90 and EWCE55B**

The Quick and Clean Way to Cut Cable and Wire Rope

Productivity

- **A broad range of hydraulic and electric tools quickly and easily cut through cable and wire rope**

Safety

- **Controlled cutting process enhances operator safety**
- **Minimal spark risk compared with torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

Internal Mechanics

EWCH-Series: Cylinder is driven by an external Enerpac pump.

EWCE-Series: Cylinder is driven by a radial pump powered by an electric motor

Typical Wire and Cable Cutting Applications

- Telecommunications
- Electrical installation and maintenance
- Power generation and transmission
- Shipbuilding

▼ *Guillotine-style blades make quick work of electrical cables and wire rope.*

EWCH-Series Hydraulic Wire and Cable Cutters

EWCH-Series Hydraulic Wire and Cable Cutters

EWCH-Series Hydraulic Wire and Cable Cutters are ideal for use in production facilities where demanding, high-volume cutting applications are often encountered.

Each tool is driven by a specialized external hydraulic pump, which provides greater cutting force and allows for higher duty cycles compared with other cutter types.

EWCH Series

CE

Maximum Material Hardness (Cable):
43 HRc

Maximum Material Diameter:
3.54 - 7.09 inches

Maximum Operating Pressure:
10,000 psi

① Guillotine-style blades maintain effectiveness throughout rigorous use
② Cutting head can be opened and closed to help position material to be cut
③ Eyebolt facilitates easy lifting
④ Double-acting cylinder with advance and retract buttons improves control and reduces jamming
⑤ External hydraulic pump helps keep tool cooler and working longer (pump, hose, and pump coupler sold separately)

EWCH180

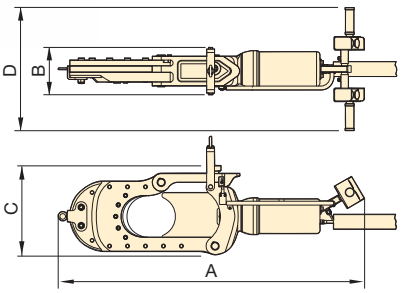

EWCH90

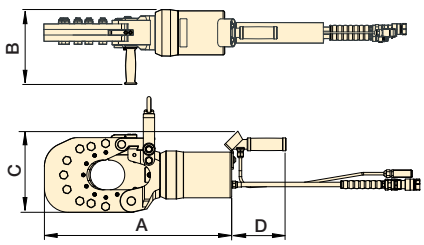

EWCH140

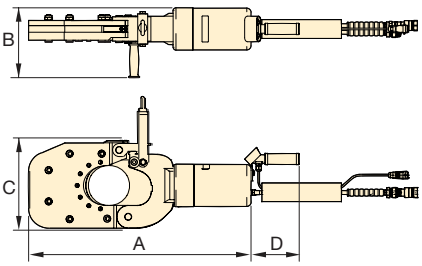

Pumps and Accessories

The EWCH-Series Cutters are designed to work with ZE6410X-Series pumps.

The pump and hose are sold separately. Both are required for the system to function. See page 19 for complete details on required pumps and accessories.

Cutter Model Number	Pump Model Number	Hose Model Number
EWCH90, EWCH140, EWCH180	ZE6410XG-S	CH720EC
	ZE6410XJ-S	
	ZE6410XK-S	
	ZE6410XW-S	

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

Maximum Material Diameter* (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Cutting Force (tons)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in) A	B	C	D	Wt. (lbs)	Replacement Blade Kit Number
3.54	**EWCH90**	94,275	43	61.8	10,000	22.9	11.1	9.9	6.7	119	**EWCH9001K**
5.51	**EWCH140**	94,275	43	61.8	10,000	30.8	9.7	12.2	6.7	198	**EWCH14001K**
7.09	**EWCH180**	94,275	43	89.0	10,000	53.7	8.3	15.8	21.7	330	**EWCH18001K**

* Maximum material properties indicated refer to the material to be cut.

EWCE-Series Electric Wire and Cable Cutters

ENERPAC
TOOLS. SERVICES. SOLUTIONS.

EWCE-Series Electric Wire and Cable Cutters

EWCE-Series Electric Wire and Cable Cutters combine the efficiency and safety of their hydraulic counterparts with the greater portability of electric tools. Their lighter weight allows for easier carrying and positioning. Available in 120V and 230V versions.

EWCE Series

Maximum Material Hardness:
48 HRc

Maximum Material Diameter:
1.65 - 2.17 inches

Voltage:
120 and 230 Volts

* ETL certification applies to 120V tools only

① Durable, guillotine-style blades maintain effectiveness throughout rigorous use
② Cutting head opens wide for easy positioning of wire or cable
③ Robust handles enable easy positioning and transport
④ Double-acting cylinder with directional control improves handling and reduces jamming

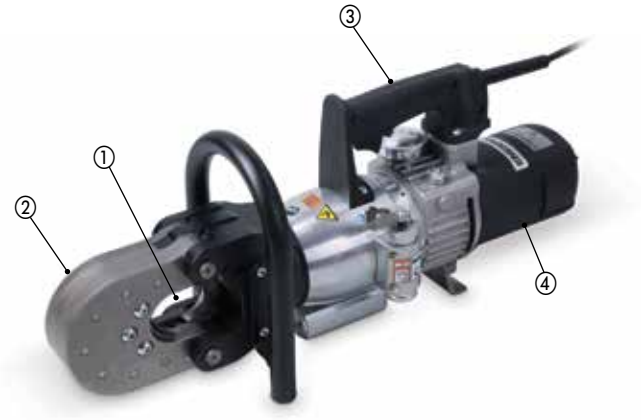

▼ *Cut through wire and cables with ease.*

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 6-15 plug)
E = 230V, 50 Hz (with European-style SCHUKO plug)

Dimensions shown in inches.

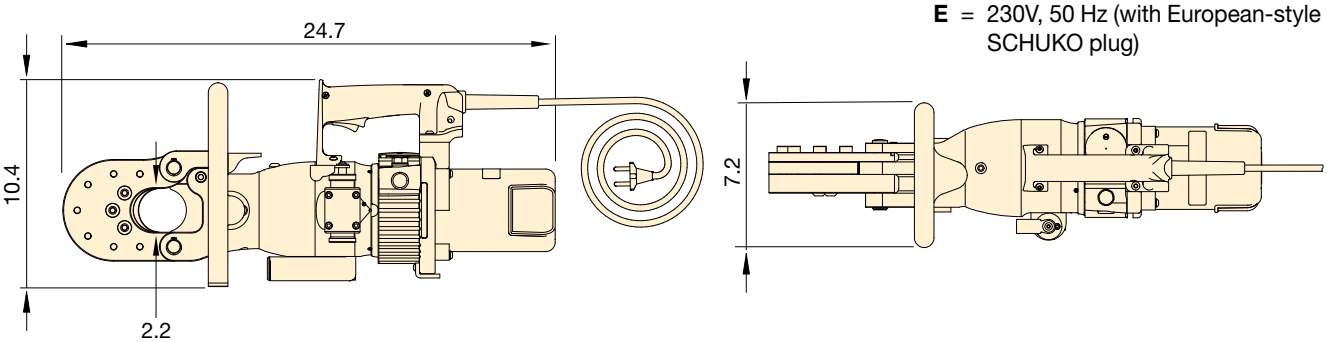

Max. Material Diameter* (in)		Power Specifications				Model No.	Maximum Material Hardness*	Maximum Cutting Force	Cord Length	Weight	Replacement Blade Kit Number
Cable	Rope	Volts	Hz	Amps	Watts		(HRc)	(tons)	(ft)	(lbs)	
2.17	1.65	120	60	11.0	1300	**EWCE55B**	48	38.2	6	55	**EWCE5501K**
2.17	1.65	230	50	6.8	1400	**EWCE55E**	48	38.2	10	55	**EWCE5501K**

* Maximum material properties indicated refer to the material to be cut.

WIRE & CABLE CUTTER
Typical Applications

Cutting heavy-duty wire ropes and cables using traditional methods can be an arduous and hazardous job. The material must be held in place while the operator attempts to cut through it, usually with an angle grinder or gas saw. This generally results in a shower of sparks and occasionally a decimated blade.

Wire Rope Cutting

Cutting wire rope with the EWCE-Series Cutter is simple. The head opens to allow the rope to be positioned. The robust blades slice through it in seconds, allowing the job to be done safely and quickly with minimal sparks and little effort.

Power, Networking and Communications Cables Cutting*

Power transmission, networking and communication cables are often supplied in large spools and cut on site. The EWCE-Series Cutter can easily be transported to the application, and slices through cables up to 2.17" in diameter.

Large Cable Cutting

The powerful EWCH-Series cutters facilitate the cutting of large wire rope and cables. Driven by an external hydraulic pump, three different cutter options cut through cables up to 7" in diameter.

ADVANTAGES

▲ *The quick and clean way to cut cable and wire rope.*

PRODUCTIVITY
- A broad range of hydraulic and electric tools quickly and easily cut through cable and wire rope
- Highly durable blades outlast angle grinder or saw blades

SAFETY
- Controlled cutting process is safer than cut-off wheels
- Minimal sparks compared to alternative cutting methods

SIMPLICITY
- Head opens for positioning
- Wire Rope or Cable is held in place by blades during cutting process

* ⚠ Wire rope must be securely taped or bound to prevent unraveling during cutting process.

▼ Shown: **EFBE5017B**

Cut High-Tensile Flat Bar With Ease

Productivity

- **Cut through high-tensile flat bar in seconds**
- **Highly durable, long-lasting blades offer increased longevity and less down time**

Safety

- **Controlled cutting process enhances operator safety**
- **Minimal spark risk compared with torching, grinding and sawing methods**

Internal Mechanics

EFBE-Series: Cylinder is driven by a radial pump powered by an electric motor.

Typical Flat Bar Cutting Applications

- Commercial and residential construction
- Industrial manufacturing
- Ornamental iron work
- Metal fabrication

◀ *Cutting flat bar is fast and easy with EFBE-Series Cutters.*

EFBE-Series Electric Flat Bar Cutters

EFBE-Series Electric Flat Bar Cutters

EFBE-Series Electric Flat Bar Cutters enhance workplace safety by replacing unsafe cutting methods with a precise, controlled cutting solution. Unlike standard bar cutters, the deep cutting head design accommodates metal bar up to 2 ¾" (70 mm) high and over half an inch (15 mm) thick.

A piston release mechanism allows the blade to be stopped and reset at any time, providing the operator with a high degree of cutting precision and control. EFBE-Series Cutters are perfect for use in industrial manufacturing facilities as well as steel and metal fabrication shops.

EFBE Series

Maximum Material Hardness:
33 HRc

Maximum Material Dimensions:
1.96 x 0.67 – 2.75 x 0.59 in.

Voltage:
120 and 230 Volts

* ETL certification applies to 120V tools only

① Highly durable blades cut through flat bar, maintaining effectiveness throughout rigorous use

② Heavy-duty cutting head provides a longer operational life

③ Robust handle enables easy positioning and transport

④ Piston-release mechanism allows blade to be retracted, providing a controlled cutting process and reducing jamming

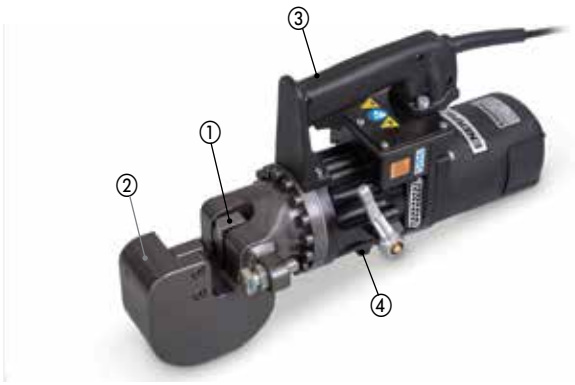

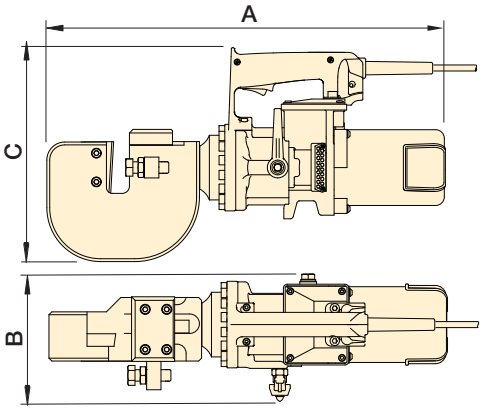

Replacement Blade Kits

To order replacement parts use one of the model numbers shown below.

For Cutter Model Number	Order Blade Kit Number
EFBE5017B	EFBE501701K
EFBE5017E	EFBE501701K
EFBE7015B	EFBE701501K
EFBE7015E	EFBE701501K

Voltage: (Model No. ending with suffix)

B = 120V, 60 Hz (with American-style NEMA 6-15 plug)

E = 230V, 50 Hz (with European-style SCHUKO plug)

Max. Material Dimensions* (in)		Power Specifications				Model Number	Maximum Material Tensile Strength*	Maximum Material Hardness*	Maximum Cutting Force	Cord Length	Dimensions (in)			Wt.
Height	Width	Volts	Hz	Amps	Watts		(psi)	(HRc)	(tons)	(ft)	A	B	C	(lbs)
1.96	0.67	120	60	11.0	1300	EFBE5017B	65,267	33	29.8	6	19.0	6.9	10.7	46
1.96	0.67	230	50	6.8	1400	EFBE5017E	65,267	33	29.8	10	19.0	6.9	10.7	46
2.75	0.59	120	60	11.0	1300	EFBE7015B	65,267	33	29.8	6	21.9	6.9	11.3	66
2.75	0.59	230	50	6.8	1400	EFBE7015E	65,267	33	29.8	10	21.9	6.9	11.3	66

* Maximum material properties indicated refer to the material to be cut.

▼ Shown: **EDCH130**

EDCH Series

Maximum Material Hardness:
41 HRc

Maximum Blade Aperture:
5.12 – 6.69 inches

Maximum Operating Pressure:
10,000 psi

Productivity

- **Powerful jaws and an exceptionally large blade aperture enable use on a large variety of applications including metal tubes, cables, profiles and similar materials**

Safety

- **Minimal spark risk compared with torching, grinding and sawing methods**
- **Cutters produce minimal vibration, helping prevent HAVS (Hand Arm Vibration Syndrome)**

① Durable blades maintain efficiency throughout rigorous use
② Double-acting steel piston and cylinder improve robustness and control
③ Control knob immediately stops the tool when released, improving operator safety
④ External hydraulic pump helps keep tool cooler and working longer (pump, hose, and pump coupler sold separately)

Pumps and Accessories

The EDCH-Series Cutters are designed to work with ZE6210X-Series pumps.

The pump and hose are sold separately. Both are required for the system to function. See page 19 for complete details on required pumps and accessories.

Cutter Model Number	Pump Model Number	Hose Model Number
EDCH130, EDCH145, EDCH170	ZE6210XG-S	CH720MC
	ZE6210XJ-S	
	ZE6210XK-S	
	ZE6210XW-S	

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

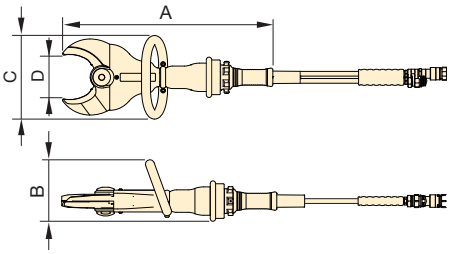

Maximum Blade Aperture (in)	Model Number	Maximum Material Tensile Strength* (psi)	Maximum Material Hardness* (HRc)	Maximum Hydraulic Operating Pressure (psi)	Dimensions (in) A	B	C	D	Weight (lbs)
5.12	**EDCH130**	94,275	41	10,000	23.2	6.7	9.2	5.1	25.4
5.70	**EDCH145**	94,275	41	10,000	27.0	8.1	9.7	5.7	37.3
6.69	**EDCH170**	94,275	41	10,000	28.9	6.8	9.8	6.7	53.4

* Maximum material properties indicated refer to the material to be cut.

▼ Shown left to right: **WHC-3380, WHC-750**

WHC, WHR, WCB, STC Series

Capacity:
3-20 tons

Cutting Capacity:
0.50-4 inches

Maximum Operating Pressure:
10,000 psi



Cutterhead Sets

Hydraulic Cutterheads are available as sets (pump, tool and hose).

Cutter Model Number	Pump Model Number	Set Model Number †
WHC-750	P-392	STC-750H
WHC-750	P-392FP	STC-750FP
WHC-750	PATG-1102N	STC-750A
WHC-1250	P-392	STC-1250H
WHC-1250	P-392FP	STC-1250FP
WHC-1250	PATG-1102N	STC-1250A

†H = Hand Pump, A = Air Operated Pump
FP = Foot Pump

- **Single acting, spring-return on all models, except WHR-1250**
- **Guillotine action for efficient operation**
- **Lifting handles on larger models**
- **Carrying bag included for easy carrying and tool protection**
- **Ideal for use with most Enerpac pumps featuring 3-way valve or dump valve and 10,000 psi pressure rating (except WHR-1250, which requires 4-way valve)**
- **CR-400 coupler and dust cap included on all models**

▼ *Steel rope is easily cut with the smooth guillotine action of an Enerpac cutterhead.*

▼ **Selection Chart Maximum Cutting Capacities** (diameter in inches)

Cutter Head Operation	Model Number	Capacity (ton)	Oil Cap. (in^3)	Steel Wire Rope, Hempcore or IWRC 6x7 6x12 6x19	Round Bar				Wire Strand				Cable		Length (in)	Wt. (lbs)	Replacement Blade Kit Numbers
					Copper Wire or Bar	Aluminum Wire or Bar	Soft Steel Bolts	Reinforcing Bar	Bare Copper Wire Strands	Bare Aluminum Wire Strands 6x7	ACSR	Guy Steel Wire Strands 1x7 1x19	Telephone Cable CPP	Underground Cable (Power)			
Single-acting	WHC-750*	4	1.2	0.63	0.75	0.75	0.56	0.50***	0.75	0.75	0.75	0.63	☆	☆	5.00	7	WCB-750
	WHC-1250*	20	8.2	1.25	1.25	1.25	1.25	1.00	1.25	1.25	1.25	0.88	☆	☆	11.00	25	WCB-1250
	WHC-2000	13	7.3	1.00	1.25	1.25	0.88	☆	2.00	2.00	2.00	0.75	☆	2.00	15.00	23	WCB-2000
	WHC-3380	3	4.0	☆	☆	☆	☆	☆	3.00	3.00	☆	☆	3.38	3.38	19.00	20	WCB-3380
	WHC-4000	8	8.4	☆	☆	☆	☆	☆	3.50	3.50	☆	☆	4.00	4.00	24.00	32	WCB-4000
D/A**	WHR-1250	20	7.5	1.25	1.25	1.25	1.25	1.00	1.25	1.25	1.25	0.88	☆	☆	16.50	26	WCB-1250

* Available in sets. ** D/A = Double-acting *** Low Alloy

☆ Will not cut designated material

▼ Shown left to right: **WMC-2000, WMC-750**

WMC, WCB
Series

Capacity:
3-20 tons

Maximum Material Diameter:
0.38-3.38 inches

- **Rotating heads for operator convenience**
- **Guillotine action (except WMC-1000) for efficient operation**
- **Carrying bag included for easy carrying and tool protection**
- **Velcro® straps to secure handles on larger models for easy transportation**
- **Spring-return on all models**
- **Lightweight, self-contained tool, can be used anywhere**

Replacement Blades

To order 60-62HRc hardened replacement blades use one of the model numbers shown below.

For Cutter Model Number	Order Blade Model Number
WMC-580	WCB-750
WMC-750	WCB-750
WMC-1000	WCB-1000
WMC-1250	WCB-1250
WMC-1580	WCB-1580
WMC-2000	WCB-2000
WMC -3380	WCB-3380

Caution!

A "☆" in the charts on these pages means that this hydraulic cutter is not designed to cut this size or type of material. Any attempt to do so may result in personal injury and damage to the unit and will void the warranty.

▼ **Selection Chart Maximum Cutting Capacities** (diameter in inches)

Model Number	Capacity (ton)	Steel Wire Rope, Hempcore or IWRC 6x7 6x12 6x19	Round Bar				Wire Strand					Cable		Length (in)	Weight (lbs)
			Copper Wire or Bar	Aluminum Wire or Bar	Soft Steel Bolts	Reinforcing Bar	Bare Copper Wire Strands	Bare Aluminum Wire Strands 6x7	ACSR Wire Strands	Guy Steel Wire Strands **1x7**	Guy Steel Wire Strands **1x19**	Telephone Cable CPP	Underground Cable (Power)		
WMC-580	**4**	.63	.63	.63	.63	.38	.63	.63	.63	.56	.56	☆	.63	15.00	8
WMC-750	**4**	.75	.75	.75	.69	.50***	.75	.75	.75	.56	.56	☆	.75	15.00	8
WMC-1000*	**20**	☆	.75	.75	.75	.75	☆	☆	☆	☆	☆	☆	☆	26.75	25
WMC-1250	**20**	1.25	1.25	1.25	1.25	.88	1.25	1.25	1.25	.88	.88	☆	☆	26.75	23
WMC-1580	**6**	.75	.75	.75	.75	☆	1.50	1.50	1.50	.63	.63	☆	1.63	22.00	15
WMC-2000	**13**	1.00	1.25	1.25	.88	☆	2.00	2.00	2.00	.75	.75	☆	2.00	24.75	24
WMC-3380	**3**	☆	☆	☆	☆	☆	3.00	3.00	☆	☆	☆	3.38	3.38	26.00	22

* Cuts .50" alloy chain grade 70 (type G7 transport or tie-down) or grade 80 (for overhead lifting applications)
☆ Will not cut designated material
*** Low Alloy

ZE6-Series Electric Pumps

Two specialty Enerpac ZE6-Series electric pump models provide the precise flow required by Enerpac's hydraulic cutters. A specially adapted twin hose connects the pumps directly with the cutters, allowing for complete control from the cutters themselves.

Optional gauges and accessories may be used to monitor pressure in the hydraulic circuit. Enerpac recommends **Gauge Kit GKHC** for use with Enerpac hydraulic cutters.

ZE6 Series

Reservoir Capacity:
2.5 gal.

Motor Size:
7.5 hp

Maximum Operating Pressure:
10,000 psi

▼ ZE6-Series Pump

- **Controlled directly from cutter with no pendant required**
- **Powered by an induction motor for industrial applications that require extended duty cycles**
- **IP54 Rating for superior dust and water protection**

Hoses

Twin hose comes with hose couplers and is available with or without an electric cable and sheath.

Tools with electric controls require an electric cable. Each hydraulic cutter's required hose and/or cable model numbers are listed on their respective product pages.

Pump Model Number	Model No.
20 ft. long, twin hose with sheath and electric cable	**CH720EC**
20 ft. long, twin hose only	**CH720MC**
Sheath only	**S720EC**
Electric cable only	**EW720EC**

ZE6-Series Pumps with 2.5-gallon reservoir

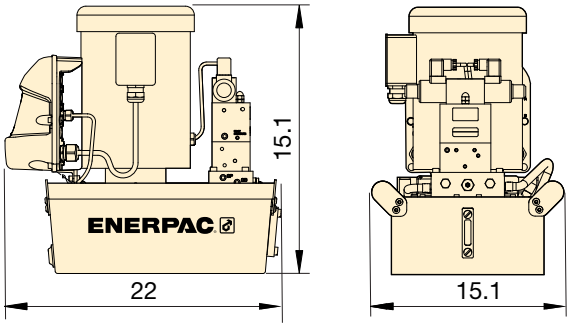

Drawings are for guidance purposes only, exact pump configurations vary.

Pump Valve Type	Pump Model Number* (Single-Stage Pump)	Motor Electrical Specification	Motor Size (hp)	Weight (lbs)	Required Twin Hose Model Number** (sold separately)	Compatible Cutter Model Number (sold separately)
Manual	**ZE6210XG-S**	208-240 V-3 ph	7.5	170	**CH720MC**	**EDCH130, EDCH145, EDCH170**
	ZE6210XJ-S	460-480 V-3 ph				
	ZE6210XK-S	440 V-3 ph				
	ZE6210XW-S	380-415 V-3 ph				
Electric	**ZE6410XG-S**	208-240 V-3 ph		185	**CH720EC**	**EBH30, EBH35, EBH52, EWCH90, EWCH140, EWCH180**
	ZE6410XJ-S	460-480 V-3 ph				
	ZE6410XK-S	440 V-3 ph				
	ZE6410XW-S	380-415 V-3 ph				

* To add a roll cage to the pump, add an "R" prior to the "S" in the nomenclature, e.g. ZE6410XG-RS.
** Tool, pump and hose are all sold separately, and all are required for the system to function.

TOOL SOLUTIONS

Enerpac offers an extensive range of tools to ensure that even your most demanding applications can be undertaken with the highest degree of safety and accuracy.

Whatever your requirement—lifting, pressing, cutting, punching, spreading or bending; you can be sure that Enerpac has the correct tool to do your job safely and efficiently.

Specialty Cutters

Hydraulic and Mechanical Pullers

SP-Series Punches

STB-Series Pipe Benders

LW-Series Lifting Wedges

Hydraulic Pumps

YOUR ENERPAC DISTRIBUTOR:

ENERPAC
TOOLS. SERVICES. SOLUTIONS.

Enerpac Worldwide Locations
For a complete list of addresses see: **www.enerpac.com/en/enerpac-locations**
User Inquiries: 800-433-2766 Distributor Inquiries: 800-558-0530

www.enerpac.com

ENERPAC | SIMPLEX | LARZEP HYDRAULIC | biach | EQUALIZER INTERNATIONAL | MIRAGE | SWEENEY | hydratight

731_03-030141518_EN-US_R1 © 2019 Enerpac - Subject to change without notice.